


Product Images



SOP8

Features

- Contact Form: 2a
- Load Voltage: 600V
- Load Current: 80mA
- Low Off-State Leakage Current: 1.0μA

Application


- Automatic Test Equipment
- Telephone Equipment
- Sensing Equipment
- Security Equipment
- I/O Modules
- Modem

Types


Output Rating		Marking model	Part Number
Load voltage	Load current		SMD
600V	80mA	MJW216S	MJW216S

Note: The "A" indicating the pin type is not marked on the product. Please refer to the ordering example model number when placing an order.


Dimensions

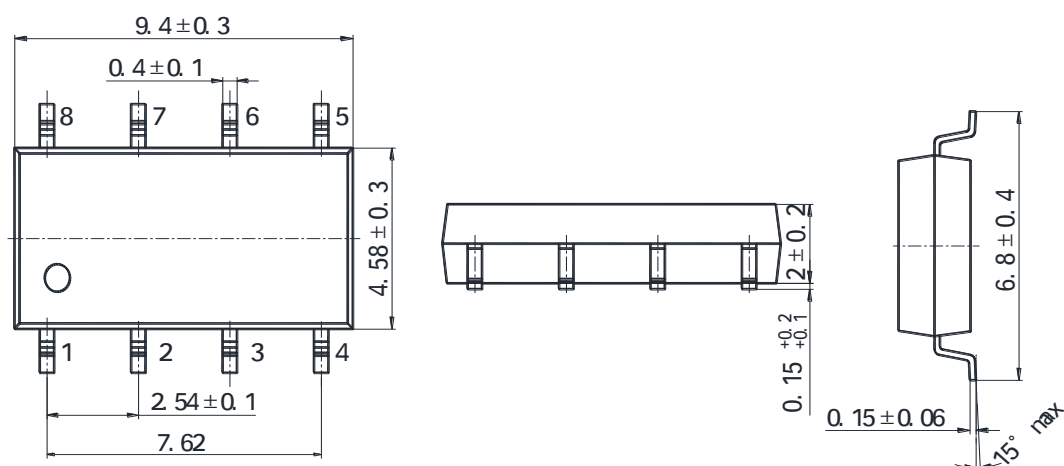

Terminal Identification



Wiring Diagram

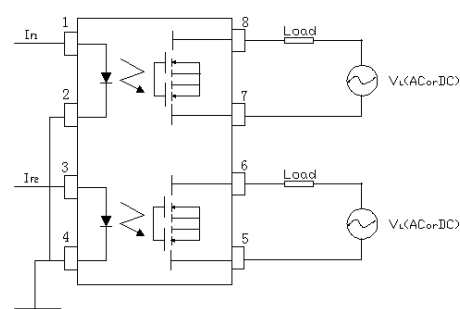

[Technical parameters (Ambient Temperature 25°C)]

■ I/O Absolute Maximum Ratings

Item			Symbol	BCW216S
Operating Temperature			T _{OPR}	-40°C ~ +85°C
Storage Temperature			T _{STG}	-40°C ~ +100°C
Input	Continuous LED Current	MAX.	I _F	50mA
	Peak LED Current LED (f=100Hz,Duty=1%)	MAX.	I _{FP}	1000mA
	LED Reverse Voltage	MAX.	V _R	5V
	Input Power Dissipation	MAX.	P _{IN}	75mW
Output	Load Voltage	MAX.	V _L	600V(AC peak or DC)
	Load Current	MAX.	I _L	80mA
	Peak Load Current (1ms,1shot)	MAX.	I _{PEAK}	1000mA
	Output Power Dissipation	MAX.	P _{OUT}	600mW
Total Allowable Power Dissipation		MAX.	P _T	650mW
I/O Breakdown Voltage		MAX.	V _{I/O}	1500Vrms
I/O Breakdown Voltage (Add H)		MAX.	V _{I/O}	3750Vrms

■ Electrical Specifications

Item			Symbol	BCW216S	Conditions
Input	LED Forward Voltage	TYP.	V _F	1.3V	I _F =10mA
		MAX.		1.5V	
	Operation LED Current	TYP.	I _{F ON}	0.2mA	
		MAX.		2mA	
	Recovery LED Voltage	MIN.	V _{F OFF}	0.7V	
Output	On-Resistance	TYP.	R _{ON}	28Ω	I _F =5mA,I _L =Rating, within 1 sec.
		MAX.		50Ω	
	Off-State Leakage Current	MAX.	I _{LEAK}	1μA	V _L =Rating
Time parameter	Turn-On Time	TYP.	T _{ON}	0.15ms	I _F =5mA,I _L =100mA
		MAX.		1ms	
	Turn-Off Time	TYP.	T _{OFF}	0.03ms	
		MAX.		0.3ms	
	Output Capacitance	TYP.	C _{OUT}	115pF	V _L =0V,f=1MHz
I/O	I/O Insulation Resistance	MIN.	R _{I/O}	1000MΩ	DC500V
	I/O Capacitance	TYP.	C _{I/O}	1.8pF	f=1MHz
		MAX.		1.5pF	