


Product Images



SOP8

Features

- Contact Form: 2a
- Load Voltage: 60V
- Load Current: 1.1A
- Low Off-State Leakage Current: 1.0μA

Application


- Automatic Test Equipment
- Telephone Equipment
- Sensing Equipment
- Security Equipment
- I/O Modules
- Modem

Types


Output Rating		Marking model	Part Number
Load voltage	Load current		SMD
60V	1.1A	MJW212GS	MJW212GS

Note: The "A" indicating the pin type is not marked on the product. Please refer to the ordering example model number when placing an order.


Dimensions

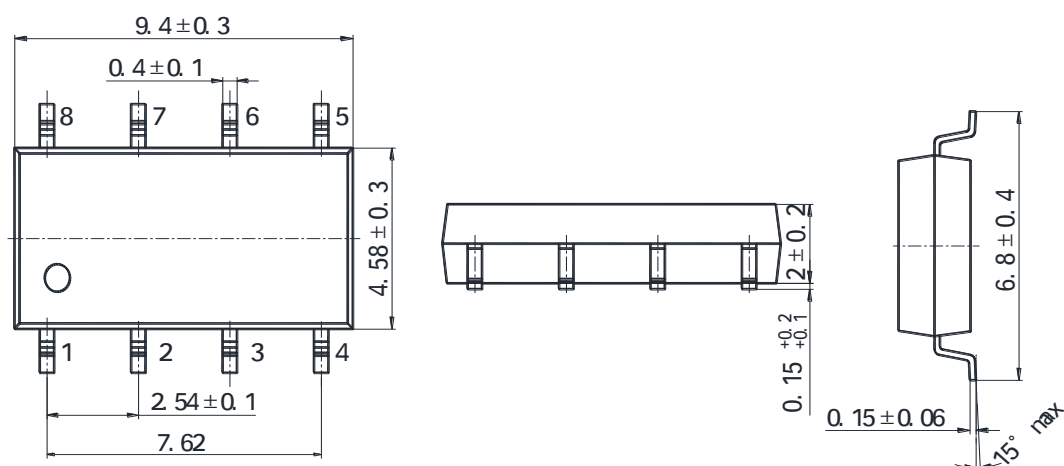

Terminal Identification



Wiring Diagram

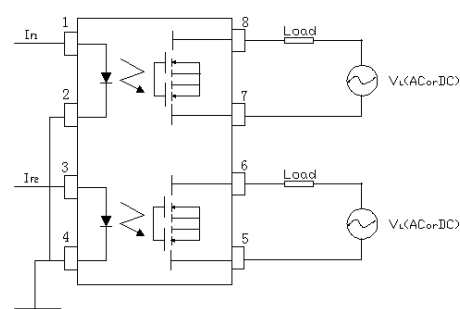

[Technical parameters (Ambient Temperature 25°C)]

■ I/O Absolute Maximum Ratings

Item		Symbol	Value
Operating Temperature		T _{OPR}	-40°C ~ +85°C
Storage Temperature		T _{STG}	-40°C ~ 100°C
Input	Continuous LED Current	I _F	50mA
	Peak LED Current LED (f=100Hz,Duty=1%)	I _{FP}	1000mA
	LED Reverse Voltage	V _R	5V
	Input Power Dissipation	P _{IN}	75mW
Output	Load Voltage	V _L	60V (AC peak or DC)
	Load Current	I _L	1.1A
	Peak Load Current (1ms,1 shot)	I _{PEAK}	4.0A
	Output Power Dissipation	P _{OUT}	600mW
Total Allowable Power Dissipation		P _T	650mW
I/O Breakdown Voltage		V _{I/O}	1500Vrms
I/O Breakdown Voltage (Add H)		V _{I/O}	3750Vrms

■ Electrical Specifications

Item 项目			Symbol	BCW212GS	Conditions
Input	LED Forward Voltage	TYP.	V _F	1.3V	I _F =10mA
		MAX.		1.5V	
	Operation LED Current	TYP.	I _{F OFF}	0.8mA	
		MAX.		2.0mA	
	Recovery LED Voltage	MIN.	V _{F OFF}	0.7V	
Output	On-Resistance	TYP.	R _{ON}	0.15Ω	I _F =5mA,I _L =Rating, within 1sec.
		MAX.		0.5Ω	
	Off-State Leakage Current	MAX.	I _{LEAK}	1μA	I _F =5mA,V _L =Rating
Time parameter	Turn-On Time	TYP.	T _{ON}	0.8ms	I _F =5mA I _L =100mA
		MAX.		1.3ms	
	Turn-Off Time	TYP.	T _{OFF}	0.03ms	
		MAX.		0.3ms	
	I/O Insulation Resistance	MIN.	R _{I/O}	1000MΩ	DC500V
I/O	I/O Capacitance	TYP.	C _{I/O}	2pF	f=1MHz

Characteristic curve

